




CAUTION: Detach power cord before proceeding



Lower heater but do not lock into place, such that it rests gently on lower platen



Using a 1/8" Allen wrench
Loosen set screw in shaft of pressure
adjustment knob and remove knob

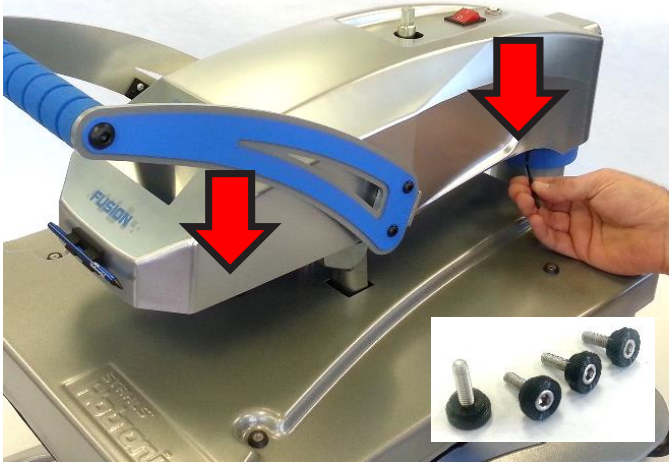

Remove 4 #8-32 x 1/2" Thumb Screws (right
2 shown) from underside of control housing
using 9/32" Allen Wrench



Lift off control housing and lay it gently on
left side of press



Locate Strain Gauge and inspect for disconnected or damaged wires.