


Remove the Touch Screen Controller

1. Insert the Paper Clip into the small hole on either side of the housing.



2. Press in the paper clip until two clicks are heard: The first click releases the controller bezel and the second click ejects it from the housing as shown.

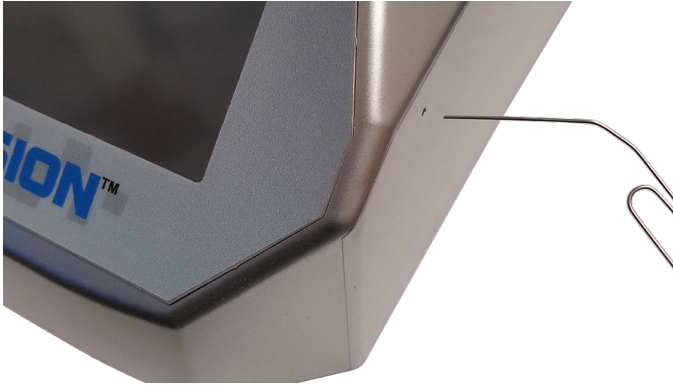

3. Repeat the process on the other side of the housing.



4. Remove the controller.



Install the Touch Screen Controller



Reconnect the Touch screen controller.



Press the two latch points with your thumb until a click is heard; if the controller bezel does not sit flush with the housing it is not latched.



Plug in and turn on heat press to verify function and calibrate the press.